


TUFLUOR® PTFE SIL

Teflon™ is a trademark of
The Chemours Company FC,
LLC used under license by
Tubigomma Deregibus S.R.L.

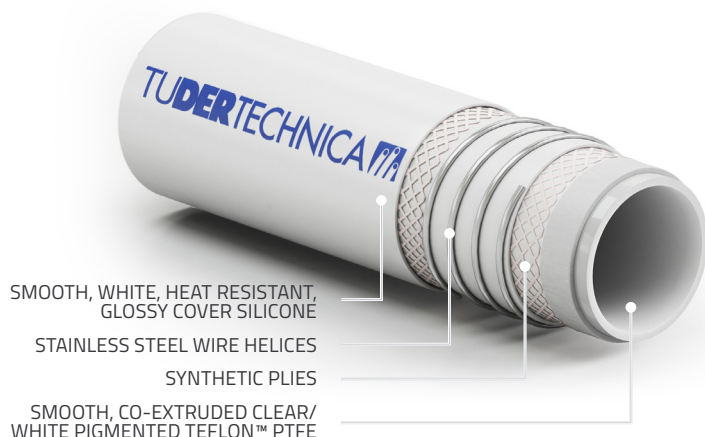

SMOOTH, WHITE, HEAT RESISTANT,
GLOSSY COVER SILICONE

STAINLESS STEEL WIRE HELICES

SYNTHETIC PLYS

SMOOTH, CO-EXTRUDED CLEAR/
WHITE PIGMENTED TEFLON™ PTFE

Suction and delivery hose for food, cosmetic and pharmaceutical products, chemicals and solvents, except for chlorine trifluoride, chlorine and fluorine gas, oxygen difluoride, phosgene and molten alkalis (for ex. sodium). Designed for the chemical industry, foodstuff, pharmaceutical and cosmetic industry, where a flexible connection is required. The hose is produced with high quality elastomers, with excellent chemical and mechanical properties. Hose tested according to the main norms for food contact materials (FCM – Reg. (CE) 1935/2004). Manufactured according to GMP (Reg. (CE) 2023/2006). Not intended for use as an implant material. Not suitable for blood or human fluids.

DESCRIPTION

Tube

TEFLON™ PTFE, co-extruded clear/white pigmented, smooth, phthalates free, tested in compliance with 1907/2006/CE (REACH). TEFLON™ PTFE is a polymer with excellent resistance to high temperature, mechanical stress and oxidation. It complies with FDA 21 CFR 177.1550; DM 21/03/1973 and subsequent amendments; USP class VI main requirements; ISO 10993 - 5:2009, 11:2006; REGULATION 1935/2004/CE; REGULATION 10/2011/CE; REGULATION 1245/2020/CE; 3-A RPSCQC for (62-02) Hose Assemblies.

Reinforcement

synthetic plies, stainless steel wire helices, on request a/s wires to discharge static electricity.

Cover

smooth, silicone, white, glossy. Heat, ageing and ozone resistant. Meets FDA 21 CFR 177.2600; BfR XV; REGULATION 1935/2004/CE.

Marking

TUDERTECHNICA TUFLUOR® PTFE SIL

TECHNICAL CHARACTERISTICS


Temperature range : -40°C / +150°C (-40°F / +302°F)

The operating temperature of the hose is directly dependent upon the specific fluid been conveyed and the length of time the fluid is in contact with the hose.

Norm : ISO 1307 for dimensional tolerances



refer to guidelines for cleaning and sanitizing
on Tudertechnica website

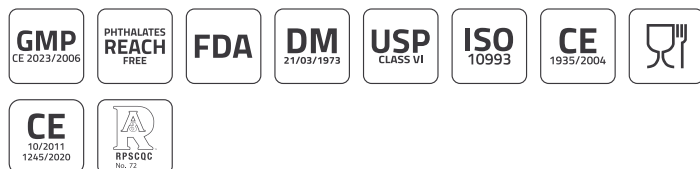

Inside diameter		Outside diameter		Length		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[mt]	[ft]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
13	0,50	24	0,94	10	32,5	0,9	13	10	150	40	600	0,47	0,31	45	1,77
19	0,75	30	1,18	10	32,5	0,9	13	10	150	40	600	0,61	0,41	70	2,76
25	1,00	36	1,42	10	32,5	0,9	13	10	150	40	600	0,76	0,51	90	3,54
32	1,25	43	1,69	10	32,5	0,9	13	8	120	32	480	0,93	0,62	120	4,72
38	1,50	50	1,97	10	32,5	0,9	13	7	105	28	420	1,26	0,84	140	5,51
50	1,97	62	2,44	10	32,5	0,9	13	7	105	28	420	1,60	1,07	180	7,09
63,5	2,50	79,5	3,13	10	32,5	0,9	13	6	90	24	360	2,69	1,80	320	12,60
75	2,95	91	3,58	10	32,5	0,9	13	5	75	20	300	3,24	2,17	380	14,96
100	3,94	117	4,61	10	32,5	0,9	13	4	60	16	240	5,06	3,39	580	22,84

Data refer to ambient temperature (20°C); we recommend a reduction of 20% working pressure for every 100°C of temperature increase. Other diameters, wall thickness and pressure only on specific request. Available also with Teflon™ PTFE black tube (contact Tudertechnica for datasheet). We reserve the right to supply in random lengths shorter than 10mt.

REV-2022-07-01